


Cartridge Heater

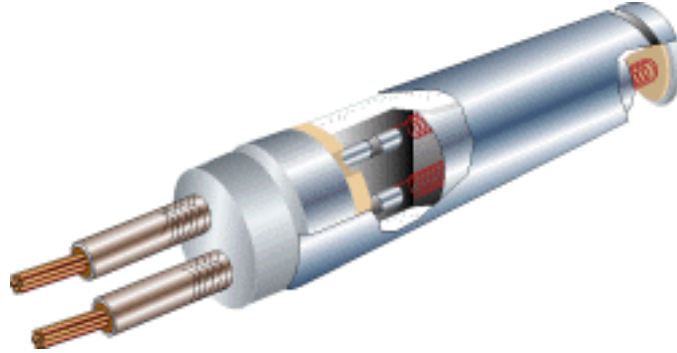

Metric Hi-Temp – Internally connected with 10” Fibreglass Flexible Leads

Diameter		Length		Watts	120V	240V
mm	inches	mm	inches			
6.5	0.225	50	1.968	100	◆	◆
6.5	0.225	100	3.937	250	◆	◆
8.0	0.314	50	1.968	150	◆	◆
8.0	0.314	100	3.937	300	◆	◆
8.0	0.314	200	7.874	550	◆	◆
10.0	0.393	50	1.968	175	◆	◆
10.0	0.393	100	3.937	350	◆	◆
10.0	0.393	200	7.874	750	◆	◆
10.0	0.393	300	11.811	1200	◆	◆
12.5	0.492	50	1.968	250	◆	◆
12.5	0.492	100	3.937	500	◆	◆
12.5	0.492	200	7.874	900	◆	◆
12.5	0.492	300	11.811	1500	◆	◆
16.0	0.629	50	1.968	300	◆	◆
16.0	0.629	100	3.937	600	◆	◆
16.0	0.629	200	7.874	1250	◆	◆
16.0	0.629	300	11.811	2000	◆	◆

Other lengths and loadings are available upon request.



ERO Controllers



Twist Melt Bolt



Flexi-couples



Leaf Thermocouple



Band Heater



Cartridge Heater

Helium Projects Ltd

Projects House,
1 South Farm Industries, Worthing,
West Sussex, BN14 7JH
Tel: +44(0) 1903 211121 Fax: +44(0) 1903 211130
email: sales@helium.uk.net
Website: www.helium.uk.net